






CB3 High UN 50H

50H/X/.../F/CRAEMER BVT 40514/2880/800

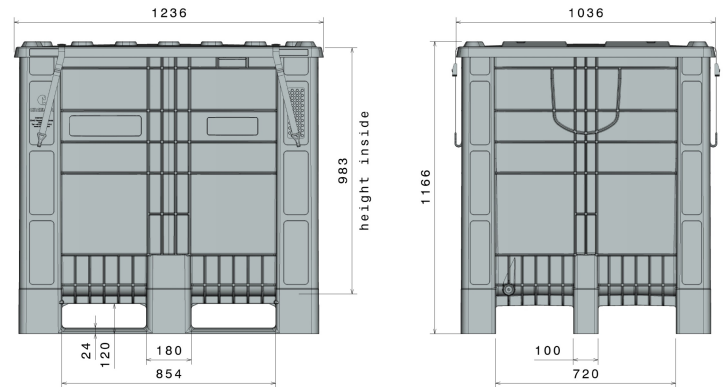

Art.-Nr.: 83271998

Technical Data ^{*1}			
External Dimensions L x W x H (mm)	1200 x 1000 x 1140 mm (with lid: 1237 x 1036 x 1166 mm)	Internal Dimensions L x W x H (mm)	1108 x 897 x 983 mm
Weight (kg)	56,5 kg	Volume (l)	1000 l
Material ^{*2}	PE		
Load capacity (kg)	kg Stacking Load 1600kg	kg Holding Capacity 800kg	kg Dynamic Load
Characteristics		Options	
Colour: light grey Manufactured in one piece Runners: 3, unwelded With lid and 2 tensioning straps Stackable Temperature stability: -30 °C to +40 °C, briefly up to +90 °C Resistant to most chemicals and cleaning agents Food-safe. HACCP compliant Container is based on DIN EN 13626 and DIN EN ISO 12048 The design type complies with the test provisions of the international regulations for packagings for the transport of dangerous goods (packaging groups II and III)		Transponder (RFID)	
Loading quantities (Pcs / Approximate amount)			
On request			
Labelling			
Customised printing and numbering available on request depending on quantity. Position upon consultation.			

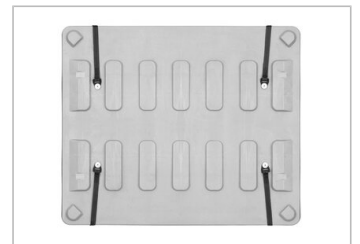

*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.